
Bourgault 3310-2008 Instructions



## www.rotomudscrapers.com

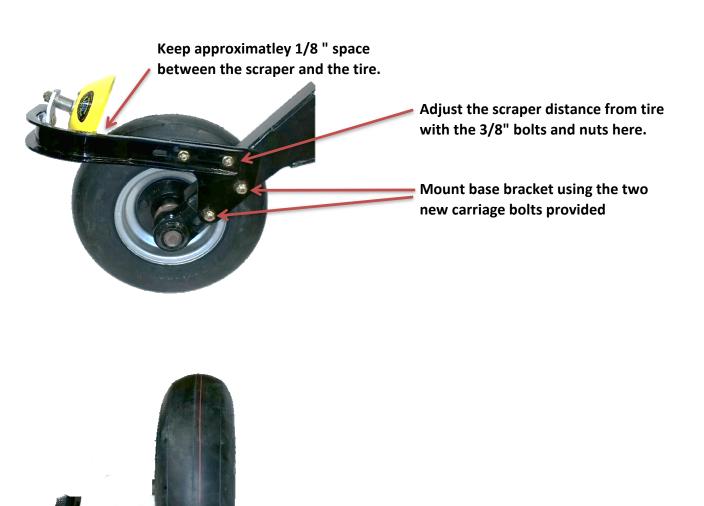

Slide the scraper in the slot so that it is offset minimum 3/4" from the edge of the tire on a 4" wide tire like this one.

The zinc angle bracket with the slot is fastened to the "C" Channel with a 1" carriage bolt and nut.