


Pillar 1 Instructions

www.rotomudscrapers.com



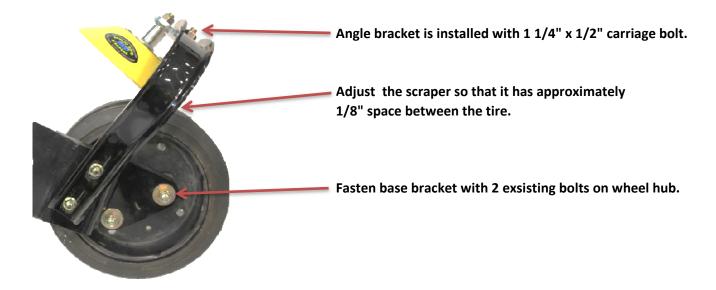

Use a straight edge (Carpenters Square) and adjust the scraper in the slot so that the scraper is at 3/4" from the side of the tire.